


NOUVEAU HAMILTON HA5801N- ___ H

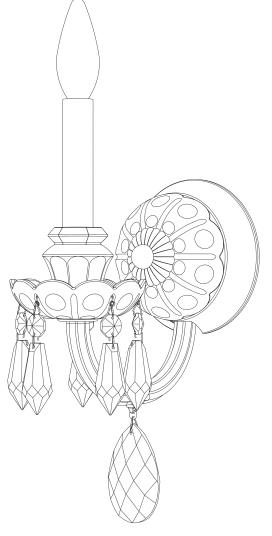


THIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADEMARK OF SWAROVSKI LIGHTING, LTD.


1 Light
Diameter: 5"
Height: 16"
Extension: 7-1/2"
Hanging Weight: 3 lbs.

SCHONBEK

1870

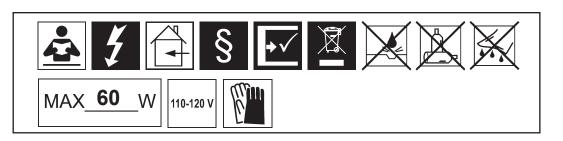



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

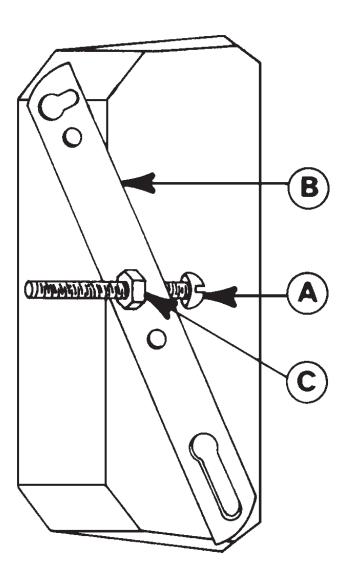


1 MAKE SURE THAT POWER TO THE OUTLET BOX IS DISCONNECTED!!

- **2** Thread long screw "A" through crossbar "B" and attach crossbar to outlet box using 2 screws round head 8-32 x 1" (not supplied with wall bracket.)
- **3** Test fit wall bracket by guiding it over screw "A". Adjust screw "A" so that it extends approximately 1/4" through wall bracket. Remove wall bracket. Thread nut "C" onto screw and tighten it against crossbar. (NOTE: In some installations, due to space, nut "C" might have to go on the other side of the crossbar.)
- **4** Turn arm to line up hole in arm with pin in plate. Tighten lock washer and nut to secure arm in place.
- PIN
- **5** Connect the wires of the wall bracket to the power wires of the outlet box, guide wall bracket over screw "A" and secure with threaded half ball supplied. NOTE: Fixture MUST be grounded.
- **6** Install bobeche and screw bulb into socket. Test power to insure proper wiring before hanging trim from fixture.

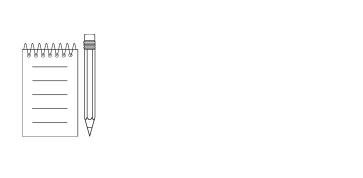

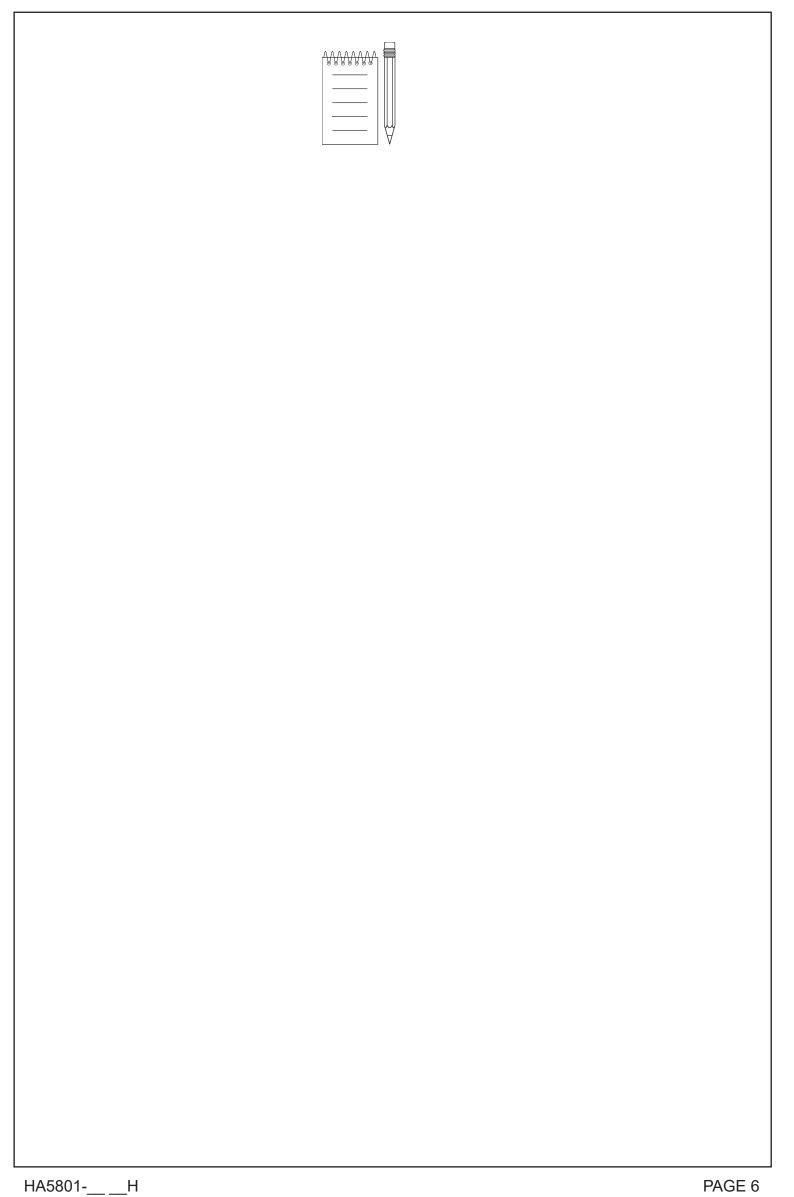

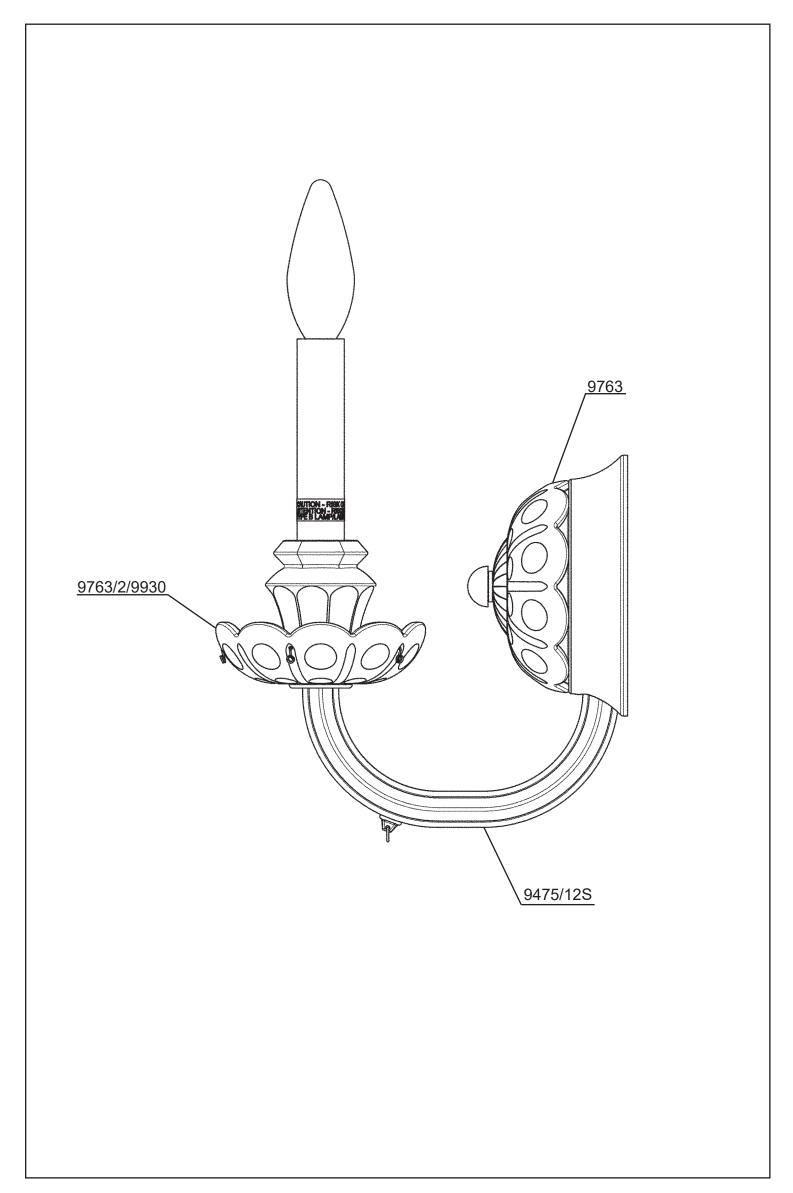



You will need 1 - B10 25 Watts Recommended 60 Watts Max

Install bulbs and be sure to test fixture BEFORE trimming.



